


Mod. **AF140**

BN20SC220235

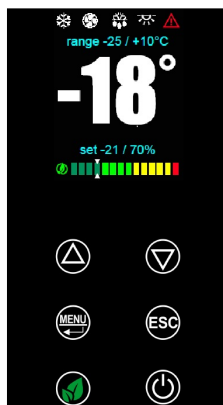

MAIN FEATURES

- Monobody construction with internal and external finish in Stainless Steel (Scotch-Brite satin)
- External back panel in prepainted steel
- External bottom in stainless steel, internal bottom molded to containment
- Inner room with rounded corners for easy cleaning and hygiene
- 85/93 mm insulation thickness
- Copper-aluminum evaporator with cataphoresis anti-corrosion treatment
- Painted iron condensing coil with high thermal output
- Front opening panel to facilitate periodic maintenance (condenser cleaning)
- Magnetic gasket on four sides and counter-magnet on the gasket ledge
- Lower hinge fixed frontally for installation on plinth
- Ergonomic full-height door handle
- Stainless steel feet Ø 2" height-adjustable H 150÷180mm with anti-scratch cap

INTERNAL SETUP:

- Internal compartment with 24-position molded sides, 3 Rilsan GN2/1 grids supplied
- LED light

COOLING SYSTEM:

- Electrical connection with Schuko 230V-1Ph-50Hz plug
- System mounted on a single block structure with steps, which enables optimal use of internal space
- Ecological refrigerant R290 for chiller and freezer condensing units
- Indirect ventilation thanks to the full height ducting system
- Automatic condensation water evaporation device without electric power supply
- Connectivity (optional)

CONTROLS AND SAFETY DEVICES:

- Multilingual touch screen control board with set function, recipe book, humidity set, HACCP, ECO function
- Maestro[®] self-learning software
- Control equipped with Coldroom probe and evaporator probe
- Compressor with automatic reset thermal protector against overheating
- Evaporator fan stops automatically when door is opened
- Alarm signaling: HACCP, AH / AL (high / low temperature), Open Door
- The alarms and the operating data can be viewed a PC using dedicated software


VERSIONS / ACCESSORIES (OPTIONALS):

- Water-cooled unit

Mod. **AF140**

BN20SC220235

Revolving castors



Mod. **AF140**

BN20SC220235



MODELLO:		AF140
NET WIDTH	mm	1400
NET DEPTH	mm	850
90° OPENING DOOR DEPTH	mm	1460
NET HEIGHT	mm	2080
NET WEIGHT	Kg	200
PACKED WIDTH	mm	1460
PACKED DEPTH	mm	860
PACKED HEIGHT	mm	2200
PACKED WEIGHT	Kg	225
PACKED VOLUME	m³	2.76
NET HEIGHT DOOR	mm	1480
DOOR OPENING WIDTH	mm	1234
INNER DEPTH	mm	710
INSULATION THICKNESS	mm	85
FLOOR HEIGHT	mm	225
N° OF COMPARTMENTS	n°	1
N° OF DOORS	n°	2
INTERNAL SETUP		6 GN 2/1+3 MID
POWER SUPPLY		230/1/50
CAPACITY	Lt	1085
NUMBER OF LOAD POSITIONS	n°	24+24
PITCH	mm	55
REFRIGERANT	gas	R290
CONSUMO (UNI EN 16825)	kWh/24h	12.1
NOMINAL CURRENT	A	3.35
DEFROST TYPE		elettric
ABSORBED ELECTRICAL POWER	W	710
COOLING POWER	W	753
NOIS LEVEL	dB(A)	57
QUANTITY CHARGE GAS	g	110
CLIMATE CLASS		5
ENERGY CLASS		D
TEMPERATURE	°C	-25 -18

(*) NT - Evap. Temperature -10°C / Cond. Temperature +45°C

(*) BT-Cecomaf Evap. temperature-25°C/Cond. temperature +45°C



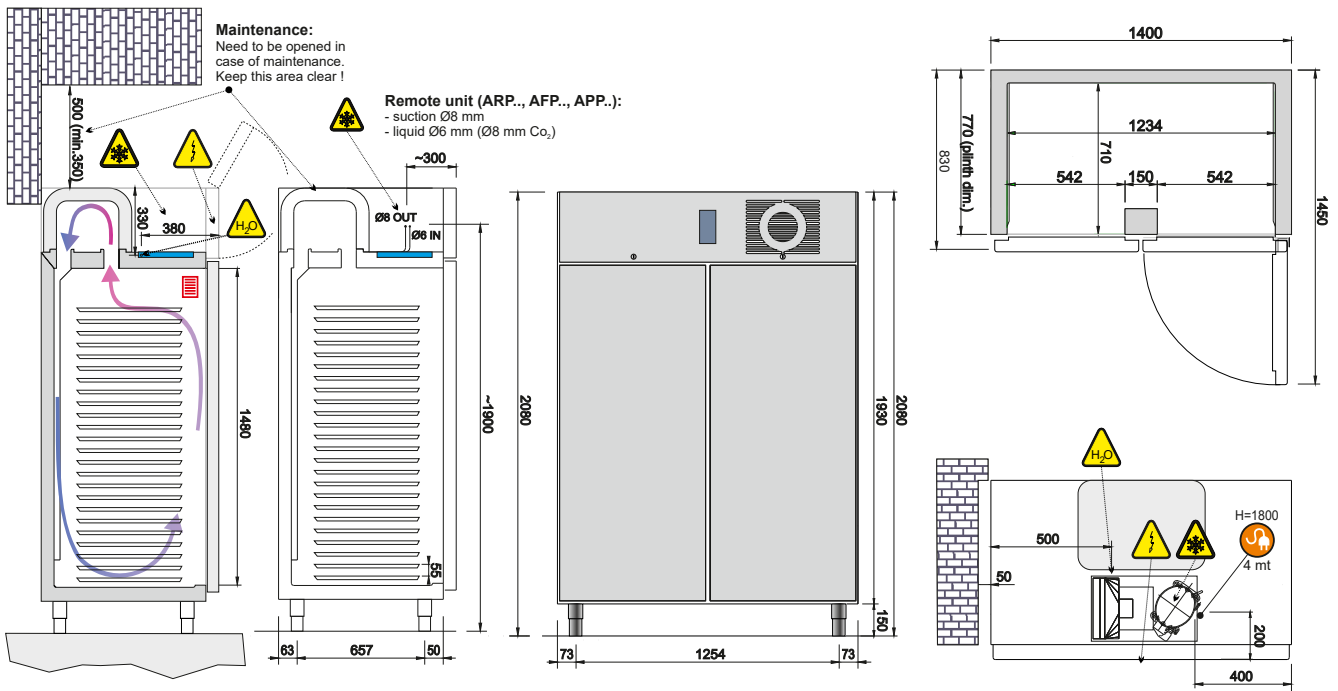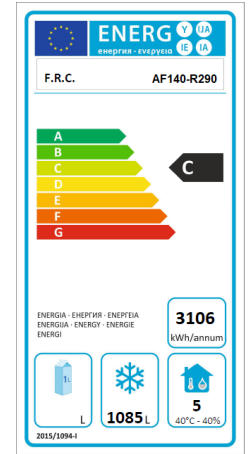

Mod. **AF140**

BN20SC220235



Maintenance:
Need to be opened in case of maintenance. Keep this area clear!

Remote unit (ARP., AFP., APP.):
- suction Ø8 mm
- liquid Ø6 mm (Ø8 mm CO₂)

	Power cable position & length / Position und Länge des Speisekabels / Posizione e lunghezza cavo alim.		Drainage pipe / Ablaufrohr / Tubo scarico
	Refrigerant tubes / Kälteleitungen / Tubi refrigerante		Electrical components position / Position der elektrischen Komponente